

VEGATRONIC 1000 INCLINED

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE



MAIN FEATURES




- 1 Gentle product-handling execution
- 2 Entry-level design
- 3 Compact footprint
- 4 Maximum versatility

BENEFITS

- 1 Suitable to run a variety of fragile and brittle products, dry, fresh and frozen.
- 2 Lowest cost of ownership and lowest cost per pack
- 3 Reduced cost for floor space
- 4 Wide range of pack styles (pillow, BB, Quattro, Flexcan etc.) and films (lamine, LDPE, paper etc.)

IMA Ilapak's Vegatronic 1000 INCLINED is an economical compact foot-print machine in gentle product-handling execution capable to run a variety of pack styles in dry or wet applications.

TECHNICAL DATA

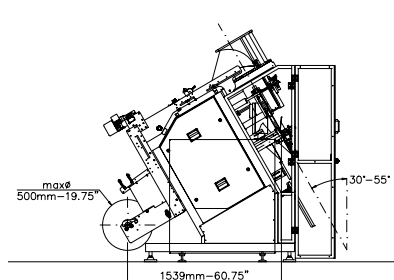

Machine Speed	60 cpm
Wrapping Materials	Heat sealable materials (lamine, co-extruded, recyclable, etc.), polyethylene
Electronic Platform	Omron PLC, Allen Bradley PLC*, Siemens PLC*
Program Memory	40 programs
HMI	Colour TFT 6" touch screen, Allen Bradley*, Siemens*
Power Requirement	AC 400 V \pm 5%, 3 phase, neutral, 50/60 Hz, 5.9 kW, 9.7 A
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE
Electrical cabinet	Remote
Machine dimensions (W x D x H)	1254 x 2366 x 1985 mm (49.5 x 93.25 x 78.25")
Machine finishing	Electrostatic epoxy powder coating, stainless steel*
Machine Weight	800 kg (1765 lb)
BAG DIMENSIONS	
Max. width	380 mm (15"), 370 mm (14.5") for LDPE
Min. width	50 mm (2")
Max. length**	380 mm (15")
FILM REEL DIMENSIONS	
Max. width	780 mm (30.75"), 830 mm (32.75")*
Max. outer diameter	500 mm (19.75")
Core diameter	76 mm (3"), 152 mm (6")*

* optional

** greater length feasible on request



ILAPAK ITALIA S.p.A.

Via L. Lama 11/13 • 52045 Foiano della Chiana (AR) • Italy

Phone +39 0575/1695501 • Fax +39 0575/649753

marketing.ilapak@ima.it • ilapak.com • ima.it

