

YOUR BEST PARTNER IN PACKAGING

The Carrera 1500 responds to the budget, build quality and flexibility requirements of mid-range food and non-food operations.

This latest addition to the Carrera portfolio incorporates incremental innovations that have enabled Ilapak to stretch the performance/price ratio of the system. A radical re-engineering of the machine frame has produced the first Ilapak flow wrapper with a tubular frame for added robustness, whilst on the sealing system, heavy duty shafts and surrounding bearings allow for greater and more consistent seal-jaw pressure. This improved jaw profile results in superior seal appearance and integrity.





TECHNICAL SPECIFICATIONS

Machine Speed	Up to 130 cpm, single jaw. Higher speeds with multiple jaws. Production output dependent upon product, film and machine specifications.
Product Dimensions	
LENGTH	50/550 mm - 2/21.6" with any jaws centres and length
WIDTH	20/230mm - 0.8/9" with jaw length 250mm - 9.8" 20/360mm - 0.8/14.2" with jaw length 400mm - 15.7"
HEIGHT	Up to 90mm - 3.5" with jaw centre 150mm - 5.9" Up to 140mm - 5.5" with jaw centre 210mm - 8.3"
Film Cut-Off	Up to 630mm - 24.8" Cut-off defined as: product length+(height x 1.2)+28mm (1.1"), depending on product characteristics.
Wrapping Materials	Suitable heat-sealable films, such as plain, or co-extruded polypropylene (PP), laminate films (e.g. OPP+PE), polythene films (PE) as well as cold sealable films of suitable quality
Film Reel Dimensions	
CORE \varnothing	76mm - 3"
OUTER \varnothing	350mm - 13.8"
WIDTH	500mm - 19.7"
Film Reel Max Weight	40 kg - 88 lbs
Electronic Platform	PLC Controlled machine
Power Requirement	From 220 to 480V, 50/60 Hz, 3-phase, 5kVA
Compressed Air	6 bar, 1l/min with air gusseting
Machine Weight	1000 kg - 2205 lbs

MAIN FEATURES

BENEFITS

Electronic machine with commercial available components	▶ Higher reliability components easy maintenance
Upgradable machine configuration	▶ Possibility to expand & connect the machine with different feeding systems
HMI colour touch screen with icon structure	▶ Intuitive and easy machine management by operators
Fully electronic controlled machine	▶ Easier size change operation
No product no bag	▶ Reduced film waste (no empty bag)
Misplaced detection (product out of phase inside film tunnel)	▶ No products damaged or trapped by the sealing jaws Reduced product waste No machine stoppages for out of phase products

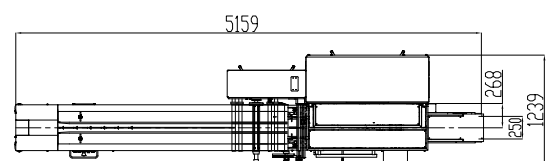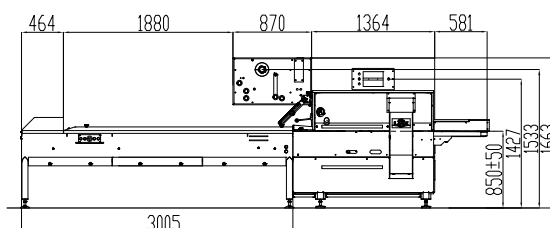

All measurements not specified in inches are given in millimetres.
Please discuss your needs with our local representative to configure these machines to your product's specific requirements. These specifications are not binding.
We reserve that right to change them without prior notice.

Discover more about us, visit:

www.ilapak.com